


Raychem CCON2X-C...

CONDUIT FOR PROTECTION OF HEATING CABLES

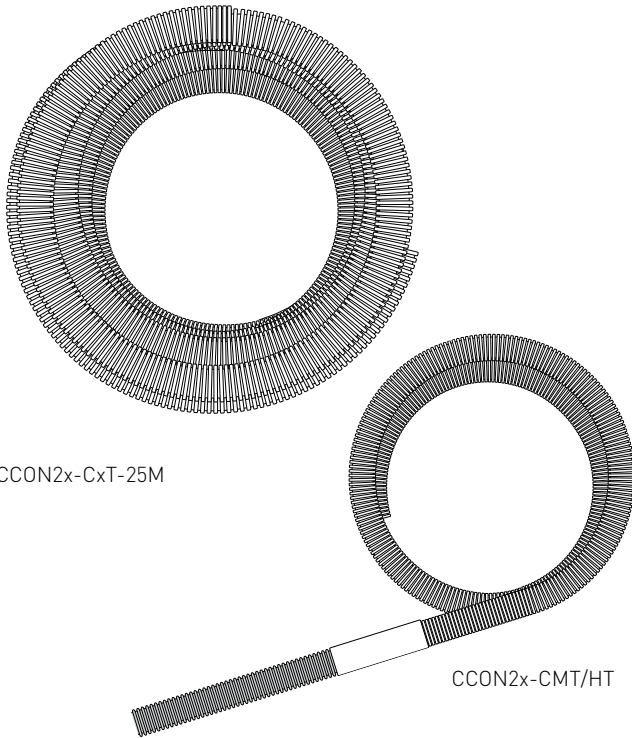

These conduits have been designed for use in combination with the conduit connection kits CCON2x-100-... They provide supplementary mechanical protection of the heating cable or cold lead between a junction box and the entry into the insulation. The conduit materials have been selected to meet the requirements for use in hazardous locations.

The resistance of the conduits to fuels, mineral oils, fats, alkalis, acids and bases is excellent.

The conduits can be cut-to-length as required in the field and can either be entered in the insulation directly or by use of an insulation entry kit.

APPLICATION

Conduit for protection of heating cables

APPROVALS

Meets electrostatic requirements for ATEX in gas groups IIA and IIB.
For gas group IIC special marking required. (Do not clean with a dry cloth)



TC RU C-BE.ME92.B.00056

PRODUCT SPECIFICATION

M20

M25

Medium temperature conduit (150°C)

	CCON20-CMT-...	CCON25-CMT-...
Conduit size	ND 17 mm	ND 23 mm
Outer diameter (nominal)	21.2 mm	28.5 mm
Bending radius (static)	40 mm	45 mm
Weight (kg/100 m)	5.7	9.9
Material	Modified polyamide	
Temperature range (continuous)	-40°C to +135°C (compatible with surface temperature of all heating cables)	
Exposure temperature	150°C (3000 h intermittent, cumulative)	
Impact strength	Minimum 6 J @ -40°C (empty conduit), min. 7 J with all heating cables	
Flame class	HB as per UL 94	

	M20	M25
HIGH TEMPERATURE CONDUIT (260°C)		
	CCON20-CHT-...	CCON25-CHT-...
Conduit size	ND 17 mm	ND 23 mm
Outer diameter (nominal)	21.1 mm	28.8 mm
Bending radius (static)	15 mm	26 mm
Weight (kg/100 m)	8.3	14.8
Material	PFA	
Temperature range	-200°C to +260°C	
Impact strength	Minimum 2.5 J (empty conduit), min. 7 J with all heating cables	
Flame class	V0 as per UL 94	

COMBINED MEDIUM AND HIGH TEMPERATURE CONDUIT

	CCON20-CMT/HT-1.67/0.33M	CCON25-CMT/HT-1.67/0.33M
Ideal for direct entry into cladding for high pipe temperatures	1.67 m length of medium temperature conduit for connection to the junction box connected to 33 cm of high temperature conduit for connection to the hot surface.	

ORDERING DETAILS

	M20	M25
CONDUIT SIZE	ND 17 MM	ND 23 MM
Pack of 2 m of medium temperature conduit	CCON20-CMT-2M (PN: 1244-003286/Weight: 0.12 kg)	CCON25-CMT-2M (PN: 1244-003281/Weight: 0.20 kg)
Pack of 25 m of medium temperature conduit	CCON20-CMT-25M (PN: 1244-003285/Weight: 1.44 kg)	CCON25-CMT-25M (PN: 1244-003280/Weight: 2.25 kg)
Pack of 2 m of high temperature conduit	CCON20-CHT-2M (PN: 1244-003289/Weight: 0.16 kg)	CCON25-CHT-2M (PN: 1244-003284/Weight: 0.28 kg)
Pack of 25 m of high temperature conduit	CCON20-CHT-25M (PN: 124-003288/Weight: 2.24 kg)	CCON25-CHT-25M (PN: 1244-003283/Weight: 3.90 kg)
1 pc of combination med./high temperature conduit (1.67 m medium temperature with 0.33 m high temperature)	CCON20-CMT/HT-1.67/0.33M (PN: 1244-003475/Weight: 0.135 kg)	CCON25-CMT/HT-1.67/0.33M (PN: 1244-003474/Weight: 0.24 kg)

ACCESSORIES

Insulation entry kit comprising of pipe stand with conduit connection system	IEK20-CON (PN: 1244-003291)	IEK25-CON (PN: 1244-003290)
--	--------------------------------	--------------------------------

KIT CONTENT

	2 pipe stands	1 pipe stand
	2 conduit connectors	1 conduit connector
	Pipe straps need to be ordered separately	Pipe straps need to be ordered separately



WWW.PENTAIRTHERMAL.COM

EUROPE, MIDDLE EAST, AFRICA

Tel: +32.16.213.511
Fax: +32.16.213.603
thermal.info@pentair.com

UNITED KINGDOM

Tel: 0800 969 013
Fax: 0800 968 6241
salesthermaluk@pentair.com

IRELAND

Tel: 1800 654 241
Fax: 1800 654 240
salesie@pentair.com

Pentair is owned by Pentair or its global affiliates. All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.

© 1998-2016 Pentair.