PRODUCT DATASHEET
PT-100-3L Ex i
RTD TEMPERATURE SENSOR

APPLICATION

The PT-100-3L Ex i temperature sensor is designed for use as control input for freeze protection and temperature maintenance heat tracing applications requiring pipewall or tankwall temperature sensing.

The PT-100-3L Ex i is for use with the TraceNet ECM, Electronic Control Module.

RATINGS

RTD lead wire	3 x 0,22 mm² fluoropolymer insulated
RTD lead wire outer jacket	Fluoropolymer
Resistance	100 Ohm @ 0°C
Sheath material	321 stainless steel
Accuracy	Class A (DIN60751)
Length of cable [1]	2 meters
Cable temperature range	-60 to +260°C

CERTIFICATIONS/APPROVALS

CE 0637 Ex II 2G Ex ia IIC T6..T1 Gb
IBExU13ATEX1079X

IEC IECEx IBE15.0014X

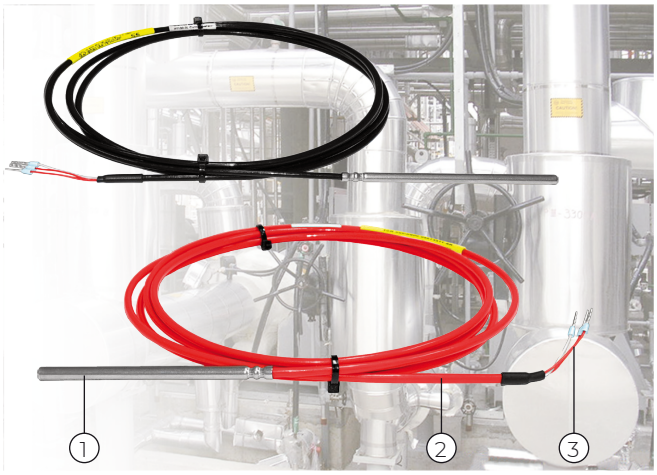

CONSTRUCTION

1. RTD probe (length 90 x diameter 6 mm)
2. RTD fluoropolymer outer jacket [2]
3. RTD lead wires

Notes

1. Longer lengths are available. Contact TC-E for additional information.
2. A black outer jacket indicates a control sensor, red indicates a limiter sensor.

TC-E B.V. · Buitendijks 37 · 3356 LX Papendrecht · The Netherlands · Tel: +31 (0) 183-20 10 88 · E-mail: sales@tc-e.nl · www.tc-e.nl

 © Thermon, Inc. · Printed in U.S.A. · Information subject to change.